CS 475: Parallel Programming Introduction

Cathie Olschanowsky (Slides developed by Wim Bohm) Colorado State University Fall 2015

Topics

- Answer: Why parallel computing?
- Overview the types of parallel computing
- Overview of speedup and efficiency
- Review the plan for this class
- Interactive/Illustrative example

Why Parallel Programming

Need for speed


- Many applications require orders of magnitude more compute power than we have right now.
 Speed came for a long time from technology improvements, mainly increased clock speed and chip density.
- The technology improvements have slowed down, and the only way to get more speed is to exploit parallelism. All new computers are now parallel computers.

Technology: Moore's Law

Empirical observation (1965) by Gordon Moore:

- The chip density: number of transistors that can be inexpensively placed on an integrated circuit, is increasing exponentially, doubling approximately every two years.
- en.wikipedia.org/wiki/Moore's_law
- This has held true until now and is expected to hold until at least 2015 (news.cnet.com/New-life-for-Moores-Law/2009-1006_3-5672485.html).

Microprocessor Transistor Counts 1971-2011 & Moore's Law

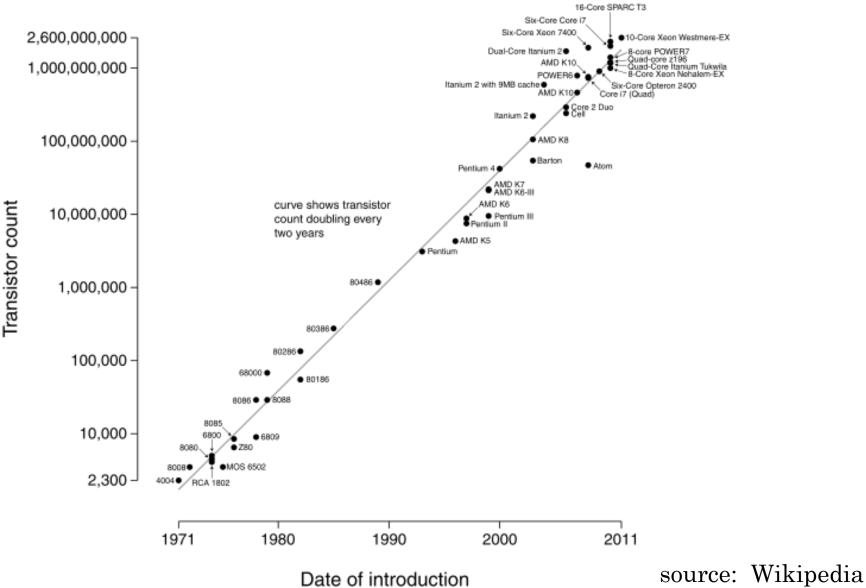

Corollary of exponential growth

When two quantities grow exponentially, but at different rates, their ratio also grows exponentially.

$$y_1 = a^x$$
, and $y_2 = b^x$ for $a \ge b \ge 1$, therefore $\left(\frac{a}{b}\right)^x = r^x$, $r \ge 1$

• $1.1^n \neq O(2^n)$

 \Box or 2^n grows a lot faster than $(1.1)^n$

 Consequence for computer architecture: growth rate for e.g. memory is not as high as for processors, therefore, memory gets slower and slower (in terms of clock cycles) as compared to processors.
 This gives rise to so called gaps or walls

"Gaps or walls" of Moore's Law


Memory gap/wall:

Memory bandwidth and latency improve much slower than processor speeds (since mid 80s, this was addressed by ever increasing on-chip caches).

(Brick) Power Wall

Higher frequency means more power means more heat. Microprocessor chips are getting exceedingly hot.

Consequence: We can no longer increase the clock frequency of our processors.

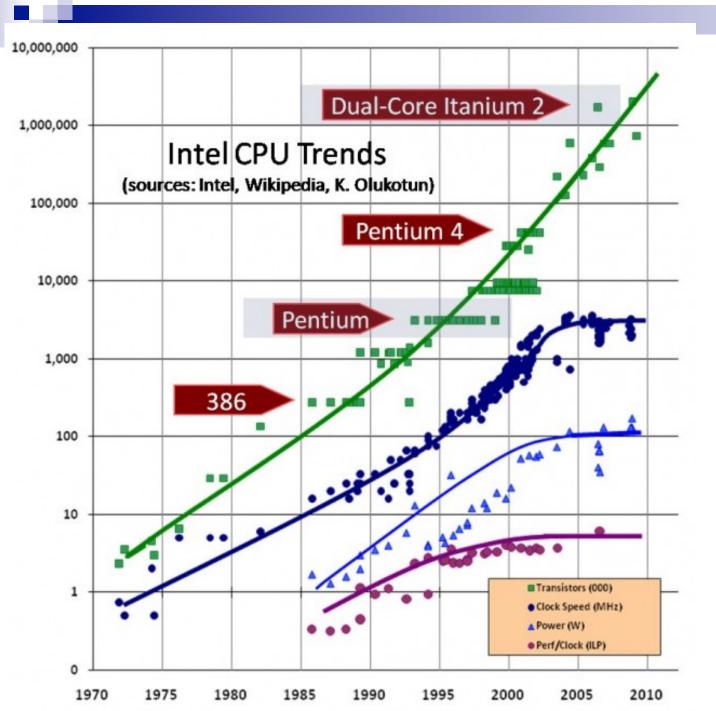

source: The Free Lunch Is Over Herb Sutter Dr. Dobbs, 2005

Enter Parallel Computing

- The goal is to deliver performance. The only solution to the power wall is to have multiple processor cores on a chip, because we can still increase the chip density.
- Nowadays, there are no more processors with one core.
 - \square "The processor is the new transistor."
 - 2005 prediction: Number of cores will continue to grow at an exponential rate (at least until 2015), has not happened as much as we thought it would. We are still in the ~16 cores / micro-processor range.

Implicit Parallel Programming

- Let the compiler / runtime system detect parallelism, do task and data allocation, and scheduling.
- This has been a "holy grail" of compiler and parallel computing research for a long time and, after >40 years, still requires research on automatic parallelization, languages, OS, fault tolerance, etc.
- We still don't have a general purpose high performance implicit parallel programming language that compiles to a general purpose parallel machine.

Explicit Parallel Programming

Let the programmer express parallelism, task and data partitioning, allocation, synchronization, and scheduling, using programming languages extended with explicit parallel programming constructs.

This makes the programming task harder, but a lot of fun and a large source of income

(very large actually ⁽²⁾)

Explicit parallel programming

- Explicit parallel programming □ Multithreading: OpenMP □ Message Passing: MPI Data parallel programming: **CUDA** Explicit Parallelism complicates programming creation, allocation, scheduling of processes □ data partitioning
 - □Synchronization (semaphores, locks, messages)

Computer Architectures

Sequential: John von Neumann

- Stored Program, single instruction stream, single data stream
- Parallel: Michael Flynn
 - □ SIMD:Single instruction multiple data
 - data parallel
 - □ MIMD: Multiple instruction multiple data

SIMD

- One control unit
- Many processing elements
 - □ All executing the same instruction
 - □ Local memories
 - Conditional execution
 - Where ocean perform ocean step
 - Where land perform land step
 - Gives rise to idle processors (optimized in GPUs)
- PE interconnection
 - Usually a 2D mesh

SIMD machines

Bit level

- ILLIAC IV (very early research machine, Illinois)
- CM2 (Thinking Machines)

now GPU: Cartesian grid of SMs

(Streaming Multiprocessors)

- each SM has a collection of Processing Elements
- each SM has a **shared memory** and a register file

□ one **global memory**

MIMD

- Multiple Processors
 - □ Each executing its own code
- Distributed memory MIMD
 - □ Complete 'PE+Memory' connected to network
 - Cosmic Cube, N-Cube, our Cray
 - Extreme: Network of Workstations,
 Data centers: racks of processors with high speed bus interconnects
 - Programming model: Message Passing

Shared memory MIMD

Shared memory

- □ CPUs or cores, bus, shared memory
- □ All our processors are now multi-core
- □ Programming model: **OpenMP**
- NUMA: Non Uniform Memory Access
 Memory Hierarchy (registers, cache, local, global)
 Potential for better performance, but problem: memory (cache) coherence (resolved by architecture)

Clarifying Reading assignments

- 1. Inside Front Cover
- 2. Chapter 3 Parallel Algorithm Design

Speedup

- Why do we write parallel programs again? to get speedup: go faster than sequential
 What is speedup?
 - T_1 = sequential time to execute a program sometimes called T, or S
 - T_p = time to execute the same program with p processors (cores, PEs) $S_p = T_1 / T_p$ speedup for p processors

Ideal Speedup, linear speedup

Ideal speedup: p fold speedup: S_p = p

Ideal not always possible. WHY?

- Certain parts of the computation are inherently sequential
- Tasks are data dependent, so not all processors are always busy, and need to synchronize

Remote data needs communication
 Memory wall PLUS Communication wall

• Linear speedup: $S_p = f p$

f usually less than 1

In the book f is the fraction of the code that is serial. Here f is the fraction of the code that is parallel.

Efficiency

- Speedup is usually not ideal, nor linear
- We express this in terms of efficiency E_p:
 E_p = S_p / p
 - \square E_p defines the average utilization of p processors \square Range?
 - What does $E_p = 1$ signify?
 - What does $E_p = f$ (0<f<1) signify?

More realistic speedups

•
$$T_1 = 1$$
, $T_p = \sigma + (o + \pi)/p$

•
$$S_p = 1 / (\sigma + (o + \pi)/p)$$

 $\boldsymbol{\sigma}$ is sequential fraction of the program

 π is parallel fraction of the program

 $\sigma + \pi = 1$

o is parallel overhead (does not occur in sequential execution) Draw speedup curves for

 $p=1, 2, 4, 8, 16, 32 \sigma = \frac{1}{4}, \frac{1}{2} \sigma = \frac{1}{4}, \frac{1}{2}$

When p goes to ∞ , S_p goes to?


Amdahl's Law (from your reading)

Plotting speedups

$$T_1 = 1, \quad T_p = \sigma + (o + \pi)/p$$

 $S_p = 1/(\sigma + (o + \pi)/p)$

p Sp	(s:1/4 o:1/4)	Sp (s:1/4 o:1/2)	Sp (s:1/2 o:1/4)	Sp (s:1/2 o:1/2)
1	1	1	1	1
2	1.33	1.14	1.14	1.00
4	2.00	1.78	1.45	1.33
8	2.67	2.46	1.68	1.60
16	3.2	3.05	1.83	1.78
32	3.56	3.46	1.91	1.88

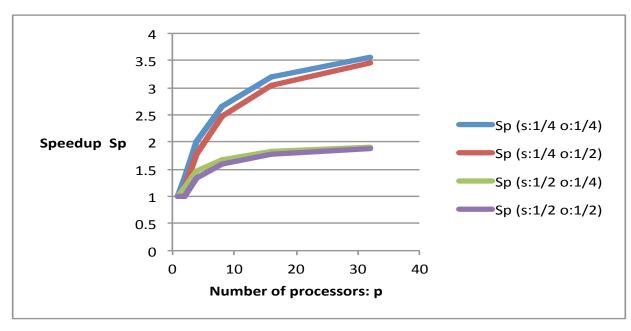

This class: explicit parallel programming

Class Objectives

- Study the foundations of parallel programming
- Write explicit parallel programs
 - □ In C plus libraries
 - □ Using OpenMP (shared memory), MPI (message passing) and CUDA (data parallel)
 - \Box Execute and measure, plot speedups, interpret / try to understand the outcomes (σ , π , σ), document performance

Class Format

- Hands on: write efficient parallel code. This often starts with writing efficient sequential code.
- four versions of a code: naïve sequential, naïve parallel, smart sequential, smart parallel
- Lab covers many details, discussions follow up on what's learned in labs.
- PAs: Write effective and scalable parallel programs:
 report and interpret their performance.

Parallel Programming steps

- Partition: break program in (smallest possible) parallel tasks and partition the data accordingly.
- Communicate: decide which tasks need to communicate (exchange data).
- Agglomerate: group tasks into larger tasks

 reducing communication overhead
 taking LOCALITY into account

 High Performance Computing is

all about locality

Locality

A process (running on a processor) needs to have its data as close to it as possible. Processors have non uniform memory access (NUMA):

- registers0 (extra) cycles
- cache 1,2,3 cycles
 - there are multiple caches on a multicore chip
- local memory 50s to 100s of cycles
- global memory, processor-processor interconnect, disk ...

Process

- COARSE in OS world: a program in execution
- FINER GRAIN in HPC world: (a number of) loop iterations, or a function invocation

Exercise: summing numbers

10x10 grid of 100 processors. Add up 4000 numbers initially at the corner processor[0,0], processors can only communicate with NEWS neighbors

Different cost models:

- □ Each communication "event" may have an arbitrarily large set of numbers (cost independent of volume).
 - Alternate: Communication cost is proportional to volume
- Cost: Communication takes 100x the time of adding
 - Alternate: communication and computation take the same time

Outline

"scatter": the numbers to processors row or column wise

 \Box Each processor along the edge gets a stack

Keeps whatever is needed for its row/column

- Forwards the rest to the processor to south (or east)
 Initiates an independent "scatter" along its row/column
- each processor adds its local set of sums

"gather": sums are sent back in reverse order of scatter and added up along the way

Broadcast / Reduction

- One processor has a value, and we want every processor to have a copy of that value.
- Grid: Time for a processor to receive the value must be at least equal to its distance (number of hops in the grid graph) from the source.
 - For the opposite corner, this is the perimeter of the
 - grid, $\sim 2sqrt(p)$ hops
- Reduction: dual of broadcast
 - \Box First add n/p numbers on each processor
 - □ Then do the broadcast "in reverse" and add along the way

Analysis

- Scatter, add local, communicate back to the corner
 - □ Intersperse with one addition operation
 - \square problem size N=4000, machine size P=100,
 - machine topology: square grid, comms cost C=100)
 - □ "Scatter:" 18 steps (get data, keep what you need, send the rest onwards) (2(sqrt(P)-1)))
 - \Box Add 40 numbers
 - "Reduce" the local answers: 18 steps (one send, add 2 numbers)
- Is P=100 good for this problem? Which P is optimal, assuming a square grid)?

Weekly Roundup

- Moore's law (AKA why parallel?)
- SIMD vs NIMD
- 3 major types of parallel computing
- Explicit versus implicit parallelization
- Locality
- Calculation speedup
 - □ Measured
 - □ Theoretical ideal (linear)
- Cost of communication