

Games – A Basic Intro

Chapter 15 - Lecture Slides

The essentials

- Player control
 -
- Game world
 -
 -
 -
 -
 -
 -
- Brains (aka. Artificial Intelligence)
 -
 - Smart & unpredictable movements by bad guys
 - Storytelling

Design

- Games require forethought in design
- Modularize functionality into “objects” (*classes*)
 - Player control
 - Game world
 -
 -
 -
 - Brains

Player Control

Player Control

- Keyboard, arrow keys, joystick, mouse
- Based on event, change Game world
 - Sprite
 -
 -
 -
 -
 - Affects
 - Hit/collide/shoot/push/etc.

Player Control

- Collisions
 - Player with object
 -
 - Player with wall
 -
 - Player with enemy
 -
- How detect collisions?

Player Control

- How detect collisions?
 - Bounding boxes
 -
 -
- What to do with a collision?
 - Move entity back to previous position?
 - Use physics to determine a bounce?

Game World

Game World

- Backdrop
- Walls
- Objects
 -
 -
- Entities
 -
 -

Backdrop

- Type
 -
 -
 -
- Need to be redrawn when something moves
 - Object picked up
 - Entity moves
 - Something disappears
 - Etc.

Objects

- Consumables, pick-up-ables
- Maintain info
 -
 -
 -
 - Info (gives life/health is food/weapon/etc)
 - Amount of [units] (amt of life/food/ strength of weapon)

Drawings

- Loading images for game
 - Use MediaTracker
 - Can do other things while images load
- MediaTracker

```
import java.awt.*;

MediaTracker tracker;
tracker = new MediaTracker(this);
    // Load images and add to the tracker
Image img = getImage( getDocumentBase(), "picture.jpg" );
tracker.addImage(img, 1);    // specify a unique # for each image
    // Wait until all images have loaded
    //(or display progress indicator while waiting)
tracker.waitForAll( );
```

Timings for Redrawing

- Careful on your animation speeds

-
-

“Do not squander time, for that is the stuff life is made of.”

-- Benjamin Franklin

Redrawing

- 3 Ways to redraw the screen

- Clear the screen, then redraw
 -
- - Complicated to figure out
- Draw new screen on an offscreen, then redraw full screen on top of current screen

Brains

Brains


- Physics

- Ball bounces,
- (x,y) based on speed and forward jump,
-

- Intelligence

-

Example: Breakout



Example: Breakout

- Set of bricks to be cleared by the user
 - Keep track of locations of ones left
 - Remove block when ball collides with
 - Calculate smart ball-bounce using physics
- Ball
 - Keep track of location, speed, direction
 - Calculate smart ball-bounce when colliding with bricks/wall/paddle
- Paddle
 - Keep track of location, speed
 - Respond to user events (arrow keys, joystick)

Example: Breakout

- Phase 0
 - Create a ball
 - Does not extend JApplet! Helper class
 - Doesn't extend anything at all!
 - Rely on paint method to draw it

```
import java.awt.Color;
import java.awt.Graphics;
class Ball
{
    int x, y, size, speed;
    int dirX, dirY;
    int appletWdt, appletHgt;
    public Ball( int _x, int _y, int _size, int _speed, int w, int h )
    {
        x = _x; y = _y; size = _size; speed = _speed; dirX = 1; dirY = 1;
        appletWdt = w; appletHgt = h;
    }
    public void paint( Graphics g )
    {
        g.setColor( Color.BLUE );
        g.fillOval( x, y, size, size );
    }
    public void move( )
    {
        x = x + speed * dirX;
        y = y + speed * dirY;
        if ( x < 0 )
            dirX = 1;
        else if ( x > appletWdt )
            dirX = -1;
        if ( y < 0 )
            dirY = 1;
        else if ( y > appletHgt )
            dirY = -1;
    }
}
```

Doesn't extend anything!
We will rely on using the
paint method when we want
to see it

```

import java.awt.Color;
import java.awt.Graphics;
class Ball
{
    int x, y, size, speed;
    int dirX, dirY;
    int appletWdt, appletHgt;
    public Ball( int _x, int _y, int _size, int _speed, int w, int h )
    {
        x = _x; y = _y; size = _size; speed = _speed; dirX = 1; dirY = 1;
        appletWdt = w; appletHgt = h;
    }
    public void paint( Graphics g )
    {
        g.setColor( Color.BLUE );
        g.fillOval( x, y, size, size );
    }
    public void move( )
    {
        x = x + speed * dirX;
        y = y + speed * dirY;
        if ( x < 0 )
            dirX = 1;
        else if ( x > appletWdt )
            dirX = -1;
        if ( y < 0 )
            dirY = 1;
        else if ( y > appletHgt )
            dirY = -1;
    }
}

```

Keep track of

- coordinates x,y
- size of the ball
- speed
- direction (in x, y)
- boundaries

```

import java.awt.Color;
import java.awt.Graphics;
class Ball
{
    int x, y, size, speed;
    int dirX, dirY;
    int appletWdt, appletHgt;
    public Ball( int _x, int _y, int _size, int _speed, int w, int h )
    {
        x = _x; y = _y; size = _size; speed = _speed; dirX = 1; dirY = 1;
        appletWdt = w; appletHgt = h;
    }
    public void paint( Graphics g )
    {
        g.setColor( Color.BLUE );
        g.fillOval( x, y, size, size );
    }
    public void move( )
    {
        x = x + speed * dirX;
        y = y + speed * dirY;
        if ( x < 0 )
            dirX = 1;
        else if ( x > appletWdt )
            dirX = -1;
        if ( y < 0 )
            dirY = 1;
        else if ( y > appletHgt )
            dirY = -1;
    }
}

```

Create a constructor

Constructors
 Called when another class calls "new Ball"
 e.g.
 Ball myball = new Ball (0,0, 10, 5, 100, 100);
 Constructors are used to initialize all your instance variables (e.g. x, y, size, speed, etc.)

```

import java.awt.Color;
import java.awt.Graphics;
class Ball
{
    int x, y, size, speed;
    int dirX, dirY;
    int appletWdt, appletHgt;
    public Ball( int _x, int _y, int _size, int _speed, int w, int h )
    {
        x = _x; y = _y; size = _size; speed = _speed; dirX = 1; dirY = 1;
        appletWdt = w; appletHgt = h;
    }
    public void paint( Graphics g )
    {
        g.setColor( Color.BLUE );
        g.fillOval( x, y, size, size );
    }
    public void move( )
    {
        x = x + speed * dirX;
        y = y + speed * dirY;
        if ( x < 0 )
            dirX = 1;
        else if ( x > appletWdt )
            dirX = -1;
        if ( y < 0 )
            dirY = 1;
        else if ( y > appletHgt )
            dirY = -1;
    }
}

```

paint draws the ball

How could you change the class to get custom-colored balls?

```

import java.awt.Color;
import java.awt.Graphics;
class Ball
{
    int x, y, size, speed;
    int dirX, dirY;
    int appletWdt, appletHgt;
    public Ball( int _x, int _y, int _size, int _speed, int w, int h )
    {
        x = _x; y = _y; size = _size; speed = _speed; dirX = 1; dirY = 1;
        appletWdt = w; appletHgt = h;
    }
    public void paint( Graphics g )
    {
        g.setColor( Color.BLUE );
        g.fillOval( x, y, size, size );
    }
    public void move( )
    {
        x = x + speed * dirX;
        y = y + speed * dirY;
        if ( x < 0 )
            dirX = 1;
        else if ( x > appletWdt )
            dirX = -1;
        if ( y < 0 )
            dirY = 1;
        else if ( y > appletHgt )
            dirY = -1;
    }
}

```

Other program that creates a Ball instance will call our move method during each time interval

Here we change the x,y coordinates based on the speed, and if we hit the boundaries, change direction

Example: Breakout

- Phase 1
 - Create the set of bricks

Example: Breakout

- Phase 1
 - Create the set of bricks
 - Keep track of the bricks in an **ArrayList**
 - Store **Rectangle** objects in the list. Each one represents the bounding area of a brick.
 - To display the bricks, go through the **ArrayList** and draw a filled rectangle for each Rectangle object in the list

Example: Breakout

- ArrayList
 - Create:

```
ArrayList <Rectangle> list;  
list = new ArrayList <Rectangle>( );
```
 - Add to the list

```
list.add( anyObject );  
e.g.: list.add( new Rectangle( 10, 20, 100, 10 ) );
```
 - Go through the list (similar to an array)

```
for( int i=0; i<list.size( ); i++ )  
    Rectangle r = list.get(i);
```

Example: Breakout

- Phase 1

```
import java.awt.*;  
import javax.swing.*;  
import java.util.*;  
public class BreakoutPart1 extends JApplet  
{  
    ArrayList <Rectangle> blocks;  
    int width, height; // dimensions of applet  
    int numBlocks; // number of blocks horizontally  
    int numRows; // number of rows - 1 easy, 5 harder  
}
```

Example: Breakout

■ Phase 1

```
public void init( )
{
    numBlocks = 10;
    numRows = 3;
    blocks = new ArrayList<Rectangle>( );
    width = getWidth( );
    height = getHeight( );
    buildBlocks( );
}
```

Example: Breakout

■ Phase 1

```
public void buildBlocks( )
{
    int sizeOfBlock = width / numBlocks;
    int heightOfBlock = 15;
    for( int rows=0; rows<width; rows += sizeOfBlock )
        for( int cols=0; cols<numRows*heightOfBlock;
            cols += heightOfBlock )
        {
            Rectangle r = new Rectangle( rows, 80+cols,
                sizeOfBlock-2, heightOfBlock-2 );
            blocks.add(r);
        }
}
```

Example: Breakout

■ Phase 1

```
public void paint( Graphics g )
{
    g.clearRect(0,0,width,height);           // clear screen
    g.setColor( Color.RED );
    // color remaining blocks
    for (int i=0; i<blocks.size(); i++ )
    {
        Rectangle r = blocks.get(i);
        g.fillRect( r.x, r.y, r.width, r.height );
    }
    g.setColor( Color.BLACK ); } }
```

Example: Breakout

■ Phase 2

- Create a bouncing ball

Example: Breakout

■ Phase 2

```
public class BreakoutPart2 extends JApplet implements
    Runnable
{
    ArrayList blocks;
    int width, height; // dimensions of applet
    int numBlocks; // number of blocks horizontally
    int numRows; // number of rows - 1 each, 5 harder
    // Part II
    Thread thread;
    Ball ball;
}
```

Example: Breakout

■ Phase 2

```
public void init( )
{
    numBlocks = 10;    numRows = 3;
    blocks = new ArrayList( );
    width = getWidth( );
    height = getHeight( );
    buildBlocks( );

    // PART II
    ball = new Ball( 50, 120, 15, 5, width, height );
    thread = new Thread(this);
    thread.start( );
}
```

Example: Breakout

■ Phase 2

```
public void run( )
{
    while( true )
    {
        ball.move( );
        checkForCollision( );
        repaint( );
        try {
            Thread.sleep(15);
        }catch( Exception ex ) { }
    }
}
```

Example: Breakout

■ Phase 2

```
public void checkForCollision( )
{
    Rectangle ballR = new Rectangle( ball.x, ball.y, ball.size,
    ball.size);
    for( int i=0; i<blocks.size( ); i++ )
    {
        Rectangle r = blocks.get(i);
        if ( r.intersects( ballR ) )
        {
            blocks.remove(r);
            getGraphics( ).clearRect(r.x, r.y, r.width, r.height);
            ball.dirX = -1 * ball.dirX;
            ball.dirY = -1 * ball.dirY;
            return;
        }
    }
}
```

Example: Breakout

- Phase 2
- No change
 - buildBlocks
 - update
 - paint


Example: Breakout

- Phase 3
 - Paddle Action

Example: Breakout

- Phase 3


```
public class BreakoutPart3 extends JApplet
    implements Runnable, KeyListener
{
    ArrayList<Rectangle> blocks;
    int width, height; // dimensions of applet
    int numBlocks; // number of blocks horizontally
    int numRows; // number of rows - 1 eash, 5 harder
    // Part II
    Thread thread;
    Ball ball;
    // Part III
    Rectangle paddle;
    int speed;
```

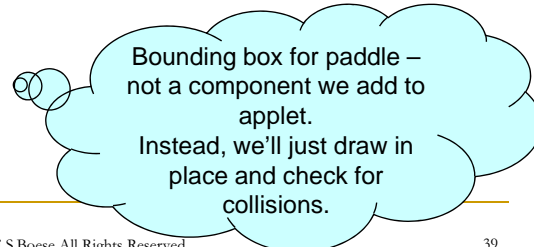

Example: Breakout

- Phase 3

```
public void init( )
{
    numBlocks = 10;    numRows = 3;
    blocks = new ArrayList<Rectangle>( );
    width = getWidth( ); height = getHeight( ); buildBlocks( );
    // Part III
    paddle = new Rectangle( 50, height-30, 50, 10 );
    addKeyListener( this );
    speed = 10;
    setFocusable(true);
    // PART II
    ball = new Ball( 50, 120, 15, 5, width, height );
    thread = new Thread(this);
    thread.start( );
}
```



Example: Breakout

■ Phase 3

```
public void checkForCollision( )
{
    Rectangle ballR = new Rectangle( ball.x, ball.y, ball.size, ball.size);
    for( int i=0; i<blocks.size( ); i++ )
    {
        Rectangle r = blocks.get(i);
        if ( r.intersects( ballR ) ) {
            blocks.remove(r);
            getGraphics( ).clearRect(r.x, r.y, r.width, r.height);
            ball.dirX = -1 * ball.dirX;
            ball.dirY = -1 * ball.dirY;
            return;
        }
    }
    // Part III
    if ( ballR.intersects( paddle ) ) {
        {
            ball.dirX = -1 * ball.dirX;
            ball.dirY = -1 * ball.dirY;
        }
    }
}
```



Example: Breakout

■ Phase 3 - handle key listener

```
public void keyTyped( KeyEvent ke ) { }
public void keyReleased( KeyEvent ke ) { }
public void keyPressed( KeyEvent ke )
{
    int code = ke.getKeyCode( );
    getGraphics( ).clearRect( paddle.x, paddle.y, paddle.width,
    paddle.height);
    if ( code == KeyEvent.VK_LEFT )
    {
        int x = paddle.x;
        x -= speed; paddle.x = x;
    }
    else if ( code == KeyEvent.VK_RIGHT )
    {
        int x = paddle.x;
        x += speed;
        paddle.x = x;
    }
}
```



Example: Breakout

■ Phase 3

■ Unchanged

- run
- paint
- update
- buildBlocks

Example: Breakout

■ Phase 4 (final version)

- Remove flicker
 - Draw screen to a buffered image
 - Draw buffered image to screen

Example: Breakout

■ Phase 4 (final version)

```
public class Breakout extends JApplet
    implements Runnable,
    KeyListener
{
    ...
    // Part IV
    BufferedImage buffer;
```

Example: Breakout


■ Phase 4 (final version)

```
public void init( )
{
    ...
    // Part IV
    buffer = new
    BufferedImage(width,height,BufferedImage.TYPE_INT_RGB);
```

Example: Breakout

■ Phase 4 (final version)

```
public void paint( Graphics g )
{
    // g.clearRect(ball.x-20, ball.y-20, ball.size+40, ball.size+40 );
    Graphics bg = buffer.getGraphics( );
    bg.fillRect(0,0,width,height); //ball.paint( getGraphics( ) );
    ball.paint( bg );
    // g.setColor( Color.WHITE );
    // g.fillRect(0,0,width,height);
    bg.setColor( Color.RED );
    for (int i=0; i<blocks.size( ); i++ )
    {
        Rectangle r = blocks.get(i);
        bg.fillRect( r.x, r.y, r.width, r.height );
    }
    bg.setColor( Color.BLACK );
    bg.fillRect( paddle.x, paddle.y, paddle.width, paddle.height );
    g.drawImage(buffer,0,0,this);
}
```

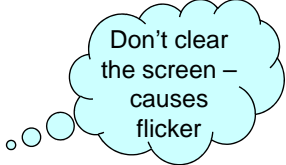


Don't clear
the screen –
causes
flicker

Example: Breakout

■ Phase 4 (final version)

```
public void paint( Graphics g )
{
    Graphics bg = buffer.getGraphics( );
    bg.fillRect(0,0,width,height);
    //ball.paint( getGraphics( ) );
    ball.paint( bg );
    // g.setColor( Color.WHITE );
    // g.fillRect(0,0,width,height);
    bg.setColor( Color.RED );
    for (int i=0; i<blocks.size( ); i++ )
    {
        Rectangle r = blocks.get(i);
        bg.fillRect( r.x, r.y, r.width, r.height );
    }
    bg.setColor( Color.BLACK );
    bg.fillRect( paddle.x, paddle.y, paddle.width, paddle.height );
    g.drawImage(buffer,0,0,this);
}
```

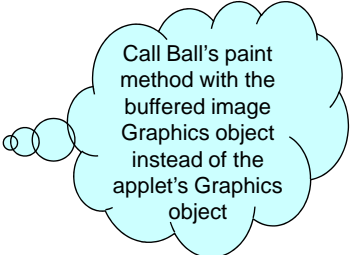

Call Ball's paint
method with the
buffered image
Graphics object
instead of the
applet's Graphics
object

Example: Breakout

- Phase 4 (final version)

```
public void paint( Graphics g )
{
    Graphics bg = buffer.getGraphics( );
    bg.fillRect(0,0,width,height);
    ball.paint( bg );
    bg.setColor( Color.RED );
    for (int i=0; i<blocks.size( ); i++ )
    {
        Rectangle r = blocks.get(i);
        bg.fillRect( r.x, r.y, r.width, r.height );
    }
    bg.setColor( Color.BLACK );
    bg.fillRect( paddle.x, paddle.y, paddle.width, paddle.height );
    g.drawImage(buffer,0,0,this);
}
```

Use the buffered
Image's Graphics
object for all
drawings


Example: Breakout

- Phase 4 (final version)

```
public void paint( Graphics g )
{
    Graphics bg = buffer.getGraphics( );
    bg.fillRect(0,0,width,height);
    ball.paint( bg );
    bg.setColor( Color.RED );
    for (int i=0; i<blocks.size( ); i++ )
    {
        Rectangle r = (Rectangle )blocks.get(i);
        bg.fillRect( r.x, r.y, r.width, r.height );
    }
    bg.setColor( Color.BLACK );
    bg.fillRect( paddle.x, paddle.y, paddle.width,
paddle.height ); g.drawImage(buffer,0,0,this);
}
```

Draw the buffered image
to the applet screen

Dungeon Games

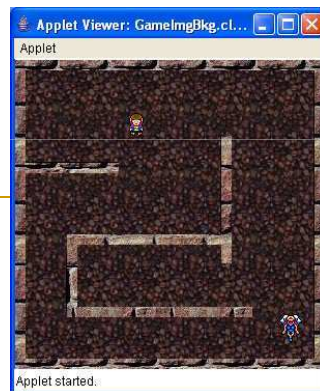

Dungeon Games

- There are *many* ways to implement
 - One big base image, only display a portion at a time. Use Polygon to determine intersections
 - Individual images for each 'room'
 - Scrolling backdrop
 - Break 'room' into small squares as an Object with pattern image that can be either entered or bounce off

Dungeon Games

- Two ways to do the Graphics (*based on what we know*)
 - Custom JComponents we create and define size/location
 - .setLocation(x, y)
 - .setBounds(x, y, width, height)
 - Paint to an off-screen BufferedImage then redraw on screen
 - Our example

Dungeon Games

- Example: BufferedImage
- Define the borders – region player can move
 - Rectangle or Polygon
 - rectangle.intersects(polygon)

```
ArrayList walls = new ArrayList( );
public void buildWalls( )
{
    // create Rectangle objects and store in ArrayList walls
    int wallThickness = 10;
    walls.add( new Rectangle( 0,0, width, wallThickness ) ); // top
    walls.add( new Rectangle( 0,0, wallThickness, height ) ); // left
    // bottom wall structure
    // vert on left
    walls.add( new Rectangle( 50,height-wallThickness-120, wallThickness, 70 ) );
    // horiz top
    walls.add( new Rectangle( 50,height-wallThickness-120, width-150, wallThickness ) );
    // horiz bot
    walls.add( new Rectangle( 50,height-wallThickness-50, width-120, wallThickness ) );
    walls.add( new Rectangle( 200,height-230, wallThickness, 130 ) ); // vert on rt
}
```

Dungeon Games

- Order of drawing graphics is important

```
public void run( )
{
    paintWalls( );
    screenBuf = createBufImage( width, height );
    Graphics gapplet = (Graphics2D)screenBuf.getGraphics( );
    while( true )
    {
        // first draw background on buffer
        gapplet.drawImage( backgroundBuf, 0,0, this );
        // then draw player on buffer
        player.paintComponent( gapplet );
        repaint( ); // draw buffer to applet
        try {
            Thread.sleep(10);
        } catch( Exception ex ) { stop( ); }
    }
}
```

Dungeon Games

- Add Items (coins/weapons/bananas)

```
public class Thing
{
    Image image;
    int x, y;
    boolean visible = false;
    public Thing( Image i )
    {
        image = i;
        x = 0;
        y = 0;
    }
    public void setLocation( int _x, int _y )
    {
        x = _x;
        y = _y;
    }
}

public void setVisible( boolean b )
{
    visible = b;
}
public boolean isVisible( )
{
    return visible;
}
public Rectangle getDimensions( )
{
    return new Rectangle( x, y, image.getWidth( null ),
        image.getHeight( null ) );
}
public void paintComponent( Graphics g )
{
    if ( visible )
        g.drawImage( image, x, y, null );
}


```

Summary

- Player Control
- Game world
- Brains