

CS 250: FOUNDATIONS OF COMPUTER SYSTEMS

[NETWORKING]

Layering Complexity

Layers at the top
Depend on the ones below

The higher you are
The more you leverage the ones below

Transport for ports
IP for addresses and routing
Link for local communications

SHRIDEEP PALLICKARA
Computer Science
Colorado State University

COMPUTER SCIENCE DEPARTMENT



COLORADO STATE UNIVERSITY

1

Frequently asked questions from the previous class survey

- The first transatlantic cable in 1858 (North America to England)
 - Cyrus Field, paper merchant from Massachusetts. 2,700 miles long and 3 miles deep.
 - USS Niagara from New York and HMS Agamemnon from England
 - Queen Victoria's message to President James Buchanan to 16 hours to travel over it
- Practical range of Bluetooth? What are the problems using it for everything?
{Problems with large files, interference issues, is a one-to-one system, high-intensity data transfers are a power drain}
- In the spectrum graph, which ones use frequency modulation for encoding?
- Is there a limit to how many protocols a given layer may have?
- For frequency modulation: Do you typically increase? Or do some systems decrease?



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.2

2

Topics covered in this lecture

- Networking Stack



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.3

3

Run, rabbit, run
Dig that hole, forget the sun
And when at last the work is done
Don't sit down, it's time to dig another one
Breathe; Waters, Gilmour, Wright; Pink Floyd

THE INTERNET PROTOCOL SUITE

COMPUTER SCIENCE DEPARTMENT



COLORADO STATE UNIVERSITY

4


The internet protocol suite is designed around a four-layer model

- This is sometimes called the **TCP/IP model**
- The four layers of the protocol suite:
 - The link layer
 - The internet layer
 - The transport layer
 - The application layer



5

The Internet Layered Protocol Stack




6

Not every device is interested in using all 4 layers

- Network hosts (such as a client or server) make use of protocols from all four layers
- Other types of networking hardware (such as switches and routers) only use protocols associated with lower layers
 - ▣ Such devices can perform their jobs without bothering to examine the higher layer protocol data contained in a network transmission



7

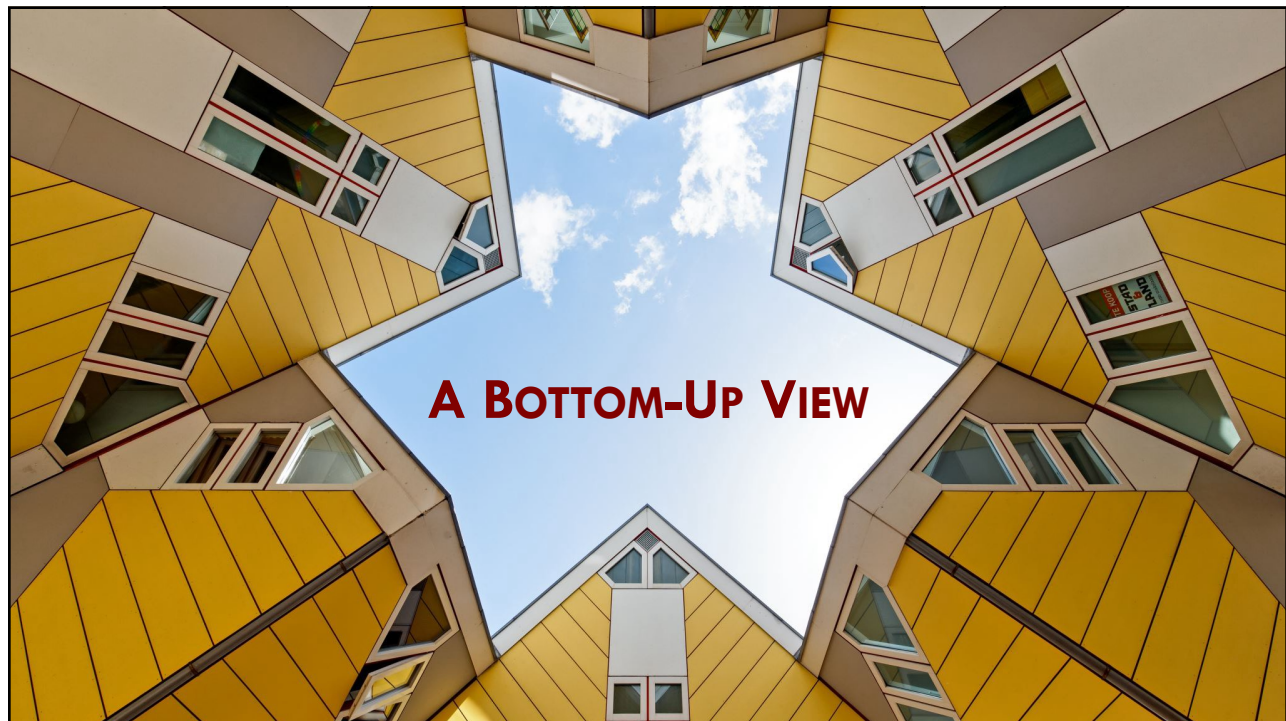

8

Link Layer

[1/2]

- The lowest level of the internet protocol suite is the link layer
- The physical and logical connections between hosts are known as network links
- Link layer protocols are used by **devices on the same network** to communicate with each other



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.9

9

Link Layer

[2/2]

- Each device on a link has a network **address that uniquely identifies it**
- For many link layer protocols, this address is known as a **media access control address (MAC address)**
 - 6-byte identifier burned into every NIC [allows 2^{48} different devices]
- Link layer data is divided into small units known as **frames**
- Each frame includes
 - A **header** describing the frame
 - A **payload** of data, and finally
 - A frame **footer** used to detect errors



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT


NETWORKING

L19.10

10

Link layer frame

- **All devices** connected to the internet participate in the link layer
- This is required, since it's the link layer that provides connectivity (either wired or wireless) to a local network



The Link Layer and MAC Addresses

- The frame header contains source and destination MAC addresses
- MAC addresses are **only useable on a local network**
 - A computer on a remote network cannot directly send data to a MAC address on your local network
- The header also includes a descriptor of the type of data carried in the frame data section



MAC Addresses


- If your home has a Wi-Fi network, Wi-Fi is the link between the hosts on your network
 - ▣ Wi-Fi protocol, defined by the IEEE 802.11 specifications, doesn't know or care what type of data is being sent over the wireless network
- Another notable link layer technology is **Ethernet**, used for **wired** physical connections
 - ▣ Ethernet is defined by the IEEE 802.3 standards
 - ▣ Ethernet typically uses a cable with pairs of copper wires inside that ends in a connector commonly known as **RJ45**



Payload size within the Link Layer frame

- Ethernet
 - ▣ 1500 bytes
- WiFi
 - ▣ 2304 bytes
- FDDI
 - ▣ 4352 bytes



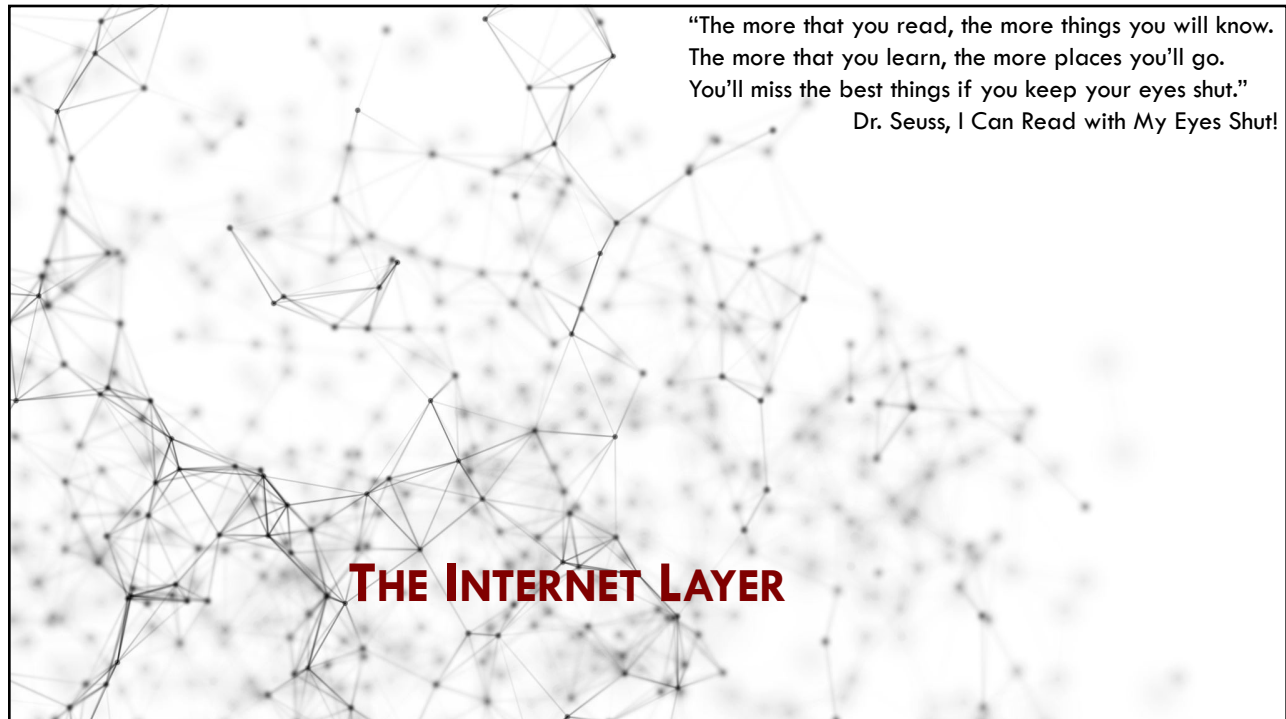


“The more that you read, the more things you will know.
The more that you learn, the more places you’ll go.
You’ll miss the best things if you keep your eyes shut.”
Dr. Seuss, I Can Read with My Eyes Shut!

THE INTERNET LAYER

15

Internet Layer

- The internet layer allows data to **travel beyond the local network**
- The primary protocol used in this layer is the **Internet Protocol (IP)**
 - ▣ Enables **routing**: the process of determining a path for data that’s transmitted between networks

 **COLORADO STATE UNIVERSITY** Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT **NETWORKING** L19.16


16

IP Addresses

- Every host on the internet is assigned an **IP address**
 - A number that *uniquely identifies* the host on the global internet
- IP addresses are usually assigned by a server on the local network
 - A device's IP address typically changes when it connects to a new network



Data sent over the internet layer is called a **packet**, which is enclosed in a link layer frame

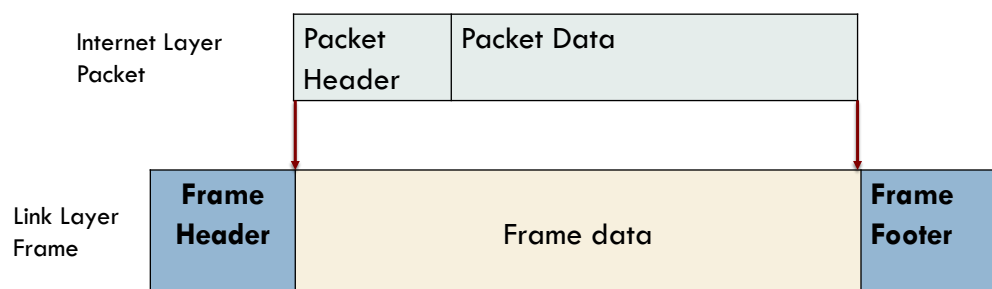

Addresses and subnets

[1/3]

- Computers connected to the same local network
 - ▣ Have IP addresses that **begin with the same leading bits**
 - ▣ Said to be on the same **subnet**
- Computers on the same subnet can communicate directly
 - ▣ Where?
 - At the link layer
 - Because they are operating on the same physical network



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.19

19

Addresses and subnets

[2/3]

- Computers that are on **different subnets** must send their traffic through a **router**
 - ▣ A device that connects subnets and operates at the internet layer
- Subnetting divides the IP address into two parts:
 - ▣ the **network prefix**, which all devices on the same subnet share
 - The number of bits included in the network prefix varies based on the network configuration
 - ▣ the **host identifier**, which is unique to a host on that subnet



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.20

20


Addresses and subnets [3/3]

24 leading bits identify the network 8 bits identify the host

11000000 10101000 00000001 00010111

192.168.1.23


24-bit network prefix 8-bit host

 **COLORADO STATE UNIVERSITY** Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT NETWORKING L19.21

21

Two versions of Internet Protocol are in use on the internet today

- Internet Protocol Version 4 (**IPv4**) is the dominant version in use
 - ▣ The other active version is Internet Protocol Version 6 (**IPv6**)
- What happened to IPv5?
 - ▣ No such protocol ever existed
 - ▣ But an experimental protocol called Internet Stream Protocol identified its IP version as 5
 - ▣ So IPv5 was skipped when the successor to IPv4 was developed

 **COLORADO STATE UNIVERSITY** Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT NETWORKING L19.22

22

Transport Layer

- The transport layer provides a communications channel that applications may use to send and receive data
- There are two commonly used transport layer protocols:
 - ▣ Transmission Control Protocol (TCP)
 - ▣ User Datagram Protocol (UDP)




Transport Layer: TCP and UDP

- TCP provides a **reliable connection** between two hosts
 - ▣ Ensures that errors are minimized, data arrives in order, lost data is resent, and so forth
 - ▣ Data sent with TCP is known as a **segment**
- UDP is a “**best effort**” protocol, meaning its delivery is **unreliable**
 - ▣ UDP is preferred when speed is valued over reliability
 - ▣ Data sent with UDP is known as a **datagram**



Depicting data segments sent using TCP

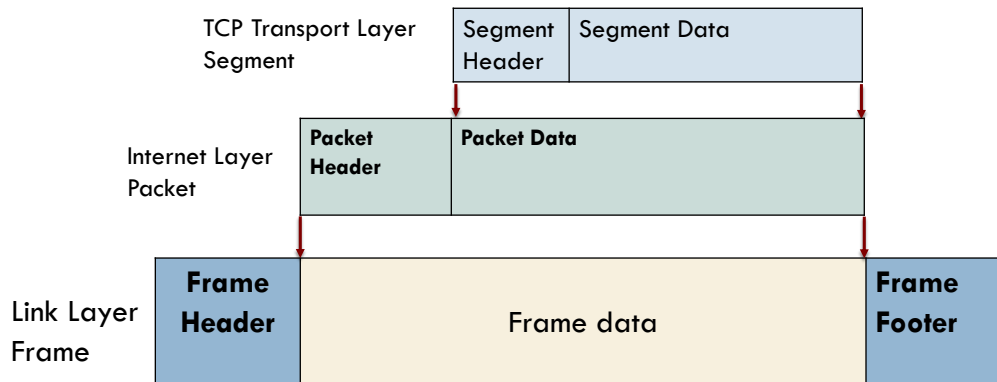

COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.25

25

Addresses ...

- The **link layer includes a destination MAC address** in the frame header
 - Identify a local network interface
- The **internet layer includes a destination IP address** in the packet header to identify the host on the internet
 - That's enough information to get a packet to a specific device on the internet



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.26

26

Once a packet has reached its destination host

- The transport layer header includes a **destination network port number**
 - Identifies the specific service or process that will receive the data
- A host with a single IP address can have **multiple active ports**
 - Each used for performing a different type of activity on the network



An analogy

[1/2]

- An **IP address** is like the *street address* of an office building,
 - A network **port number** is like the *office number* of a worker in that office building
- The IP address uniquely identifies a host computer, just as a street address uniquely identifies an office building
 - Using the internet protocol, a packet can be delivered to a host in the same way that a package can be delivered to an office building



An analogy

[2/2]

- However, once a packet arrives at the computer, the operating system must decide what to do with it
 - ▣ The **packet isn't intended for the OS itself**, but for some process running on the computer
 - ▣ In the same way, a package arriving at an office building likely isn't intended for the mailroom worker but for someone else in the building
- The OS examines the port number and delivers the inbound data to the process listening on the specified **port**
 - ▣ Just as a mailroom worker examines the name or office number on the package to deliver the package to the right person



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.29

29



30

Network Ports

- Network ports in the range of 0 to 1,023
 - Called **well-known ports**
- Ports in the range of 1,024 to 49,151 can be registered with the Internet Assigned Numbers Authority (IANA)
 - Known as **registered ports**
- Ports with a value greater than 49,151 are **dynamic ports**



31

Some port numbers

- 20 File Transfer Protocol (FTP) Data Transfer
- 21 File Transfer Protocol (FTP) Command Control
- 22 Secure Shell (SSH) Secure Login
- 25 Simple Mail Transfer Protocol (SMTP) email delivery
- 53 Domain Name System (DNS) service
- 67, 68 Dynamic Host Configuration Protocol (DHCP)
- 80 Hypertext Transfer Protocol (HTTP) used in the World Wide Web
- 123 Network Time Protocol (NTP)
- 161 Simple Network Management Protocol (SNMP)



32

Ports for servers and clients

- Servers use well-known ports to make it easy for clients to connect
- However, most network communication is a two-way street
 - So, the **client needs to have an open port as well** so that it can receive data from the server
- A client only needs to temporarily open such a port, just long enough for it to complete its communication with a server
 - Such ports are called **ephemeral ports**
 - Assigned by the networking components in the operating system



33

For example

- When a client web browser connects to a web server on port 80?
 - An **ephemeral port** on the client is also opened
 - Let's say port number 61,348
- The client sends its web request to port 80 on the server, and the server sends its response to port 61,348 on the client
- An IP address plus a port number form an **endpoint**
 - An instance of an endpoint is the **socket**



34

Network hosts (such as a client or server) make use of protocols from all four layers

- Networking hardware (such as switches and routers) only use protocols associated with lower layers
 - ▣ Link layer (for the specific hardware e.g., WiFi, Ethernet, FDDI, Token ring)
 - ▣ IP
- Switches and routers can perform their jobs without bothering to examine the higher layer protocol data



APPLICATION LAYER



Application Layer

[1/2]

- The application layer is the **final, topmost layer** of the internet protocol suite
 - The lower three layers provide a generalized foundation for communication over the internet
- Protocols at the application layer focus on **accomplishing a specific task**
 - HyperText Transfer Protocol (HTTP) for retrieving and updating web content
 - Email servers use Simple Mail Transfer Protocol (SMTP) for sending and receiving email messages
 - File transfer servers use File Transfer Protocol (FTP) to transfer files



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.37

37

Application Layer

[2/2]

- The application layer is where we get to the protocols that **describe the behavior** of applications
- The lower layers of the stack are the **“plumbing”** that enables applications to do the things they want to do over the internet



COLORADO STATE UNIVERSITY


Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.38

38

Depicting data sent from the application layer

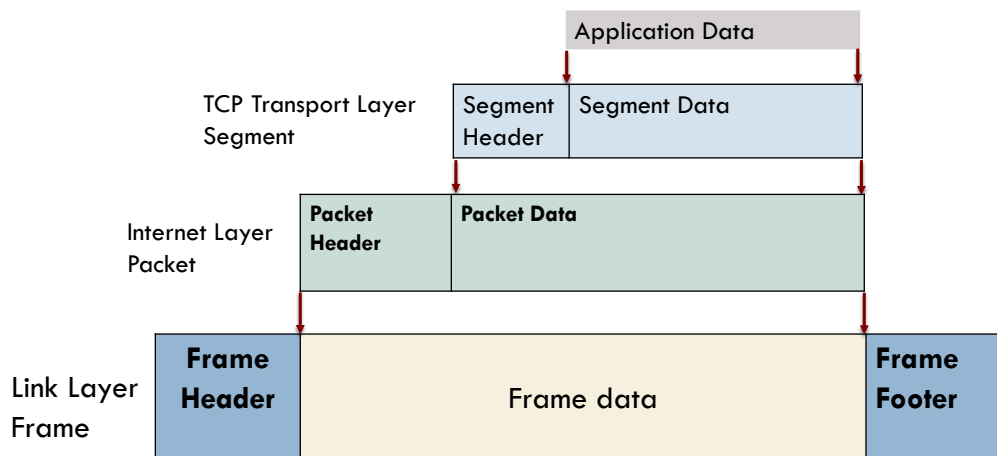

App layer protocols ...

General functionality	App-Layer Protocol
Web	HTTP
Email	POP, SMTP, IMAP
Transferring files	File transfer protocol
Mapping domains	Domain Name System
Managing networks	Dynamic host configuration protocol (DHCP)
Remote access	Secure shell
Streaming audio and video	Real-time streaming protocol
Music services (Spotify, Apple Music), videoconferencing (Zoom, FaceTime), messaging (iMessage, WhatsApp), iOS notifications, gaming (Xbox Live)	Proprietary






41


Internet architecture

- Evolved out of experiences with ARPANET
 - ▣ Funded by ARPA of the US DoD
- A **4-level** model

 **COLORADO STATE UNIVERSITY** Professor: SHRIDEEP PALICKARA
COMPUTER SCIENCE DEPARTMENT **NETWORKING** **L19.42**

42

Internet protocol graph

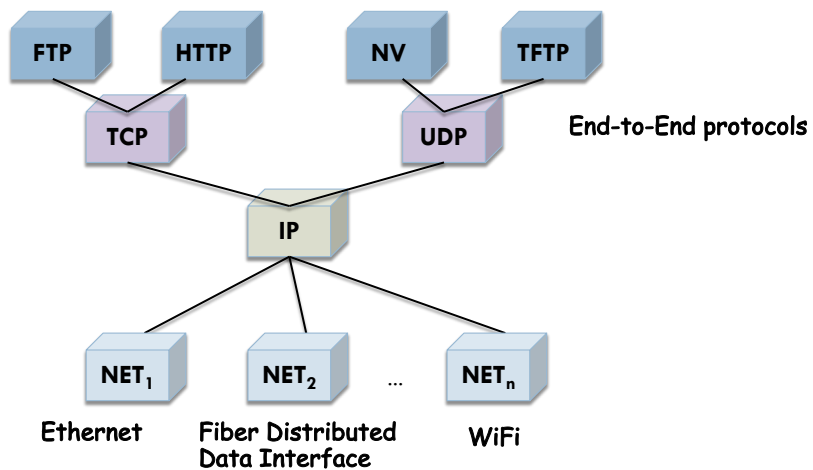

COLORADO STATE UNIVERSITY


Professor: SHRIDEEP PALICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.43

43

Alternative view of the Internet Architecture

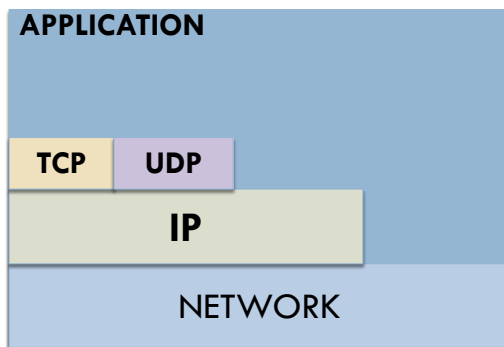

COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.44

44

Internet architecture

- DOES NOT imply strict layering
 - ▣ Bypassing immediate lower layers is possible

- Layer has an **hour-glass** shape
 - ▣ Wide at top and bottom
 - ▣ Narrow in the middle
 - ▣ **IP** is the **focal point** of the architecture



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.45

45

INTERNETWORKING

COMPUTER SCIENCE DEPARTMENT



COLORADO STATE UNIVERSITY

46

Internetwork

- Arbitrary collection of **interconnected** networks
 - ▣ To provide some sort of host-host packet delivery service
- Network of networks
 - ▣ Made up of lots of smaller networks



COLORADO STATE UNIVERSITY


Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.47

47

A simple internetwork

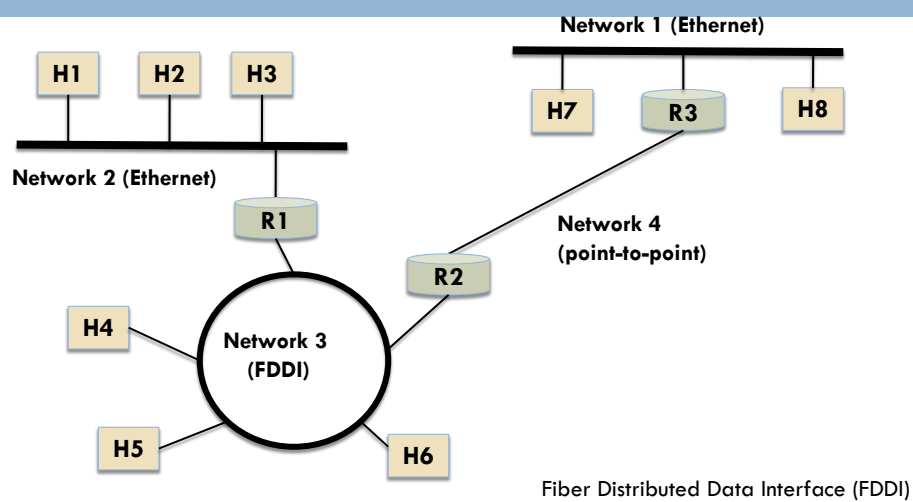

COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.48

48

Internet Protocol (IP)

- Key tool to build scalable, **heterogeneous** networks
- Runs on all nodes (hosts and routers)
- Allows nodes and networks to *function as a single logical network*
- It is possible to build an internetwork without IP
 - ▣ But IP is the only one that has faced scale issues



COLORADO STATE UNIVERSITY


Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.49

49

A simple internetwork: Communication between H1-H8

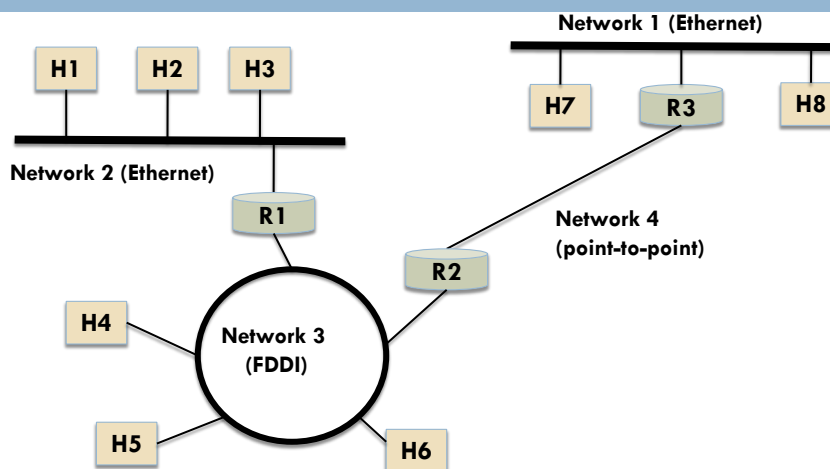

COLORADO STATE UNIVERSITY


Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.50

50

Example depicting how hosts (H1-H8) are logically connected

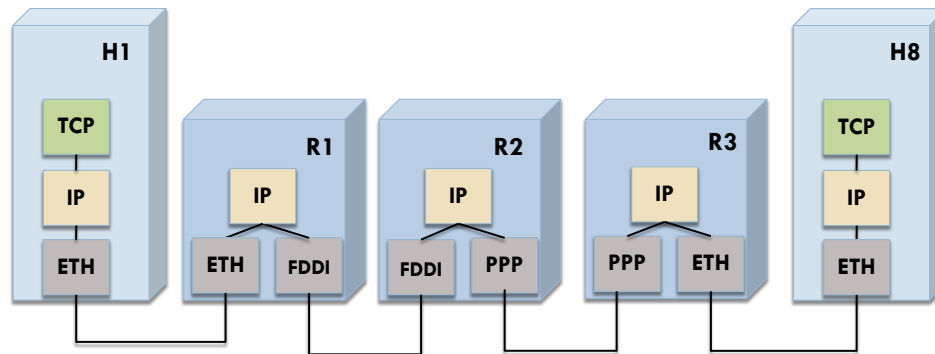

COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.51

51

The IP service model

- Datagram model of **delivery**
 - Connectionless
 - Best effort
- **Addressing** scheme
 - Identifies all hosts in the internetwork



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L19.52

52

Datagram delivery

- Datagram is a type of packet
 - ▣ Sent in a **connectionless** fashion
- No need for any **advance** setup mechanisms
 - ▣ That tell network what do when packet arrives
- Every datagram contains enough information
 - ▣ To forward packet to correct destination



The network makes a best effort to send datagrams across

- Things that could go **wrong** with the packets
 - ▣ Lost
 - ▣ Corrupted
 - ▣ Misdelayed
 - ▣ Out of order and duplicates
- When things go wrong, the network does **nothing**
 - ▣ No attempt to recover from the failure



Keeping routers simple was one of the original design goals of IP

- Important to **run over anything**
- Putting extra functionality into routers to make up for network deficiencies?
 - Not a good idea
- Higher-level protocols/apps that run above IP need to be aware of failure modes



Coding Exam II

- A total of ~~8~~ 4 problems (4 excluded ones have a strikethrough).
 - ~~□ PROBLEM 11: CASH REGISTER AT A TOY SHOP 11~~
 - PROBLEM 12: ISBN-10 VALIDATOR 12
 - PROBLEM 13: CREDIT CARD VALIDATOR (LUHN CHECK) 14
 - ~~□ PROBLEM 14: EXPRESSION EVALUATOR 16~~
 - ~~□ PROBLEM 15: ANAGRAM GROUPER 18~~
 - PROBLEM 16: CAESAR CIPHER (ENCRYPT OR DECRYPT) 20
 - PROBLEM 17: ATBASH CIPHER 22
 - ~~□ PROBLEM 18: PRIME FACTORIZATION PRINTER 24~~



The contents of this slide-set are based on the following references

- ❑ *Computer Networks: A Systems Approach*. Larry Peterson and Bruce Davie. 4th edition. Morgan Kaufmann. ISBN: 978-0-12-370548-8. [Chapter 1, 2]
- ❑ Matthew Justice. *How Computers Really Work: A Hands-On Guide to the Inner Workings of the Machine*. ISBN-10/ISBN-13 : 1718500661/ 978-1718500662. No Starch Press. [Chapter 11]
- ❑ Amrit Tiwana. *The Internet Stack*. MIT Press. [Chapter 3]

